



### DH-HAC-T1A21P-U

2MP IR HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max. 30 fps@1080p
- > Smart IR Illumination
- > 25 m illumination distance.
- > Quick-to-install eyeball saves installation time.
- > 2.8 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.

19,600,000



### DH-HAC-T2A21P-U-A

2MP IR HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max. 30 fps@1080p.
- > Smart IR Illumination.
- > 30 m illumination distance.
- > 2.8 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP12 ,67 VDC.

30,400,000



### DH-HAC-B1A21P-U-A

2MP IR HDCVI FIXED-FOCAL BULLET CAMERA

- > Max. 30 fps@1080p.
- > Smart IR Illumination.
- > 30 m illumination distance.
- > Built-in-Mic.
- > 2.8 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP12 ,67 VDC.

20,300,000



### DH-HAC-B2A21P-U-A

2MP IR HDCVI FIXED-FOCAL BULLET CAMERA

- > Max. 30 fps@1080p.
- > Smart IR Illumination.
- > 30 m illumination distance.
- > 2.8 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > Built-in mic.
- > IP12 ,67 VDC.

30,400,000



## DH-HAC-B2A51P-U-IL-AS2

5MP HDCVI IR BULLET CAMERA

- > Max. 20fps@5MP
- > HD and SD output switchable
- > 3.6mm fixed lens
- > Max. IR length 20m, Smart IR
- > IP67, DC12V

**42,300,000**



## DH-XVR1B04-I

4 CHANNEL COOPER DIGITAL VIDEO RECORDER

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 5 channels IP camera inputs, each channel up to 2MP/6MP; Max 20 Mbps Incoming Bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB

**55,800,000**



## DH-XVR1B04H-I(V2.0)

4 CHANNEL COOPER DIGITAL VIDEO RECORDER

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 6 channels IP camera inputs, each channel up to 6MP; Max 24 Mbps incoming bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB
- > Smart Search and Intelligent Video System

**73,000,000**



## DH-XVR1B08-I

8 CHANNEL COOPER DIGITAL VIDEO RECORDER

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 10 channels IP camera inputs, each channel up to 2MP/6MP Max 40 Mbps Incoming Bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB

**69,800,000**



## DH-XVR1B08H-I(V2.0)

### 8 CHANNEL COOPER DIGITAL VIDEO RECORDER

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 12 channels IP camera inputs, each channel up to 6MP; Max 48 Mbps incoming bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB
- > Smart Search and Intelligent Video System

**104,500,000**



## DH-XVR1B16-I

### 16 CHANNEL COOPER DIGITAL VIDEO RECORDER

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 18 channels IP camera inputs, each channel up to 6MP; Max 72Mbps Incoming Bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB

**119,700,000**

# **dahua**

TECHNOLOGY



Fisheye



## **DH-HAC-EW2501P**

**5MP HDCVI IR-FISHEYE CAMERA**

*1/2.8" 5Megapixel progressive scan CMOS*

*Max. 20fps@5MP*

*120db true WDR, Starlight, 2D&3D NR*

*Max. IR length 10m, Smart IR*

**STARLIGHT**



# **HDCVI**



### DH-HAC-HFW1200CLP-IL-A-S6

2MP HDCVI FIXED-FOCAL BULLET CAMERA

- > Max. 30 fps@1080p.
- > 3D NR.
- > Smart Dual Light.
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in mic.
- > 3.6 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

**29,100,000**



### DH-HAC-HFW1200CMP-IL-A-S6

2MP HDCVI FIXED-FOCAL BULLET CAMERA

- > Max. 30 fps@1080p.
- > 3D NR.
- > Smart Dual Light
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in mic.
- > 3.6 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

**35,700,000**



### DH-HAC-HFW1239CP-IL-A-S2

2MP HDCVI FIXED-FOCAL BULLET CAMERA

- > Max. 30 fps@1080p.
- > 130 dB true WDR, 3D NR.
- > Smart Dual Illuminators.
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in MIC (-A).
- > 3.6 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

**39,600,000**



### DH-HAC-HFW1239TLMP-IL-A-S2

2MP BULLET CAMERA

- > Smart Dual Illuminators
- > Max. 30 fps@1080p
- > 40 m illumination distance
- > Super Adapt
- > 130 dB true WDR, 3D NR
- > Built-in MIC (-A)
- > 3.6 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable
- > IP67, 12 VDC

**48,900,000**



### DH-HAC-HDW1200CLQP-IL-A-S6

2MP FIXED-FOCAL EYEBALL CAMERA

- > Max. 30 fps@1080p.
- > 3D NR.
- > Smart Dual Light.
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in mic.
- > Quick-to-install eyeball saves installation time.
- > 2.8 mm fixed lens
- > IP67, 12 VDC.

29,100,000



### DH-HAC-HDW1239TLQP-IL-A-S2

2MP HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max. 30 fps@1080p.
- > 130 dB true WDR, 3D NR.
- > Smart Dual Illuminators.
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in MIC (-A).
- > Quick-to-install eyeball saves installation time.
- > 2.8mm fixed lens
- > IP67, 12 VDC.

41,000,000



### DH-HAC-HFW1500TLMP-IL-A-S2

5MP HDCVI FIXED-FOCAL BULLET CAMERA

- > Max 25 fps@5MP (16:9 video output).
- > Smart Dual Light.
- > 40 m illumination distance.
- > Super Adapt.
- > Built-in MIC.
- > 3.6 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

45,400,000



### DH-HAC-HFW1509TLMP-IL-A-S2

5MP BULLET CAMERA

- > Max 25 fps@5MP (16:9 video output).
- > 120 dB true WDR, 3D NR.
- > Smart Dual Illuminators.
- > 40 m illumination distance.
- > Super Adapt.
- > Built-in MIC.
- > 3.6 mm fixed lens
- > IP67, 12 VDC.

69,600,000



### HAC-HDW1500TLMP-IL-A-S2 5MP HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max 25 fps@5MP (16:9 video output).
- > Smart Dual Light.
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in MIC.
- > 2.8 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

**45,400,000**



### DH-HAC-HDW1500CLQP-IL-A-S2 5MP HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max 25 fps@5MP (16:9 video output).
- > Smart Dual Light.
- > 20 m illumination distance.
- > Super Adapt.
- > Built-in MIC.
- > Quick-to-install eyeball saves installation time.
- > 2.8 mm fixed lens
- > IP67, 12 VDC.

**48,200,000**



### DH-HAC-HDW1509TP-IL-A-S2 5MP SMART DUAL LIGHT EYEBALL CAMERA

- > Max 25 fps@5MP (16:9 video output).
- > 120 dB true WDR, 3D NR. · Smart Dual Light
- > 40 m illumination distance.
- > Super Adapt. · Built-in MIC.
- > 2.8 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

**76,600,000**



### DH-HAC-HDW1509TLQP-LED-S2 5MP FULL-COLOR HDCVI EYEBALL CAMERA

- > Max 25 fps@5MP (16:9 video output)
- > 120dB true WDR, 3D NR
- > 24/7 color imaging
- > 20 m illumination distance
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > 3.6 mm fixed lens
- > IP67, 12 VDC

**63,400,000**



### **DH-HAC-HDW1509TP-IL-A-S2** 5MP SMART DUAL LIGHT EYEBALL CAMERA

- > Max 25 fps@5MP (16:9 video output).
- > 120 dB true WDR, 3D NR. · Smart Dual Light.
- > 40 m illumination distance.
- > Super Adapt. · Built-in MIC.
- > 3.6 mm fixed lens
- > CVI/CVBS/AHD/TVI switchable.
- > IP67, 12 VDC.

**79,100,000**



### **DH-HAC-ME1200EQP-L-S6** 2MP HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max. 30 fps@1080p.
- > CVI/CVBS/AHD/TVI switchable
- > Active deterrence with warm light
- > 2.8 mm fixed lens
- > Super Adapt
- > 3D NR
- > Smart Dual Light
- > 30 m illumination distance.
- > Quick-to-install eyeball save installation time


**37,900,000**



### **DH-HAC-ME1200EQP-LS-S6** 2MP HDCVI FIXED-FOCAL EYEBALL CAMERA

- > Max. 30 fps@1080p.
- > CVI/CVBS/AHD/TVI switchable
- > Active deterrence with warm light and siren
- > 2.8 mm fixed lens
- > Super Adapt
- > 3D NR
- > Smart Dual Light
- > 30 m illumination distance.
- > Quick-to-install eyeball save installation time


**45,400,000**

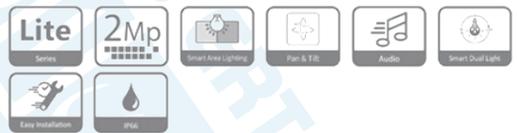

### **DH-HAC-PT1200AP-IL-A-S6** 2MP HDCVI FIXED-FOCAL PT CAMERA

- > Max. 30 fps@1080p.
- > Smart Dual Light
- > Smart Area Lighting.
- > Pan & Tilt
- > 40 m illumination distance.
- > Super Adapt.
- > Built-in Mic.
- > Quick-to-install structure saves installation time.

**55,500,000**

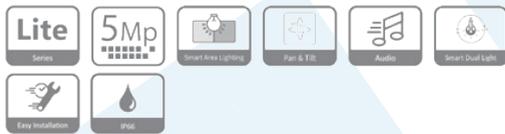

## DH-HAC-PT1500AP-IL-A-S2

5MP HDCVI FIXED-FOCAL PT CAMERA

- > Max. 25 fps@5MP (16:9 video output).
- > Smart Dual Light
- > Smart Area Lighting.
- > Pan & Tilt
- > 40 m illumination distance.
- > Super Adapt.
- > Built-in Mic.
- > Quick-to-install structure saves installation time.

68,700,000



## DH-HAC-HDW3200LP-S5

2MP HDCVI IR EYEBALL CAMERA

- > Max 30fps@1080p
- > CVI/CVBS/AHD/TVI switchable
- > Built-in Mic
- > 2.1 mm fixed lens
- > Max. IR length 3 m, Smart IR
- > DC12V

37,000,000



## DH-HAC-HUM3201BP-S2

2MP STARLIGHT HDCVI MINIATURE CAMERA

- > Starlight, 120dB true WDR, 3DNR
- > Max 30fps@1080P
- > HD and SD output switchable
- > 2.8mm fixed lens
- > Audio in interface
- > DC12V

67,400,000



## DH-HAC-EW2501P

5MP HDCVI IR-FISHEYE CAMERA

- 1/2.8" 5Megapixel progressive scan CMOS
- Max. 20fps@5MP
- 120db true WDR, Starlight, 2D&3D NR
- Max. IR length 10m, Smart IR
- DC12V

100,600,000



## XVR5108HS-4KL-I3

8CH 4K 1HDD DIGITAL VIDEO RECORDER

- > 8-channel SMD Plus
- > Up to 16 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

208,400,000

## DH-XVR4216AN-I

16CH 2HDDS DIGITAL VIDEO RECORDER

- > 16-channel SMD Plus
- > Up to 18 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

251,300,000



## XVR5116H-4KL-I3

16CH 4K 1HDD DIGITAL VIDEO RECORDER

- > 16-channel SMD Plus
- > Up to 32 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

383,700,000

## DH-XVR5216AN-4KL-I3

16CH 4K 2HDDS DIGITAL VIDEO RECORDER

- > 16-channel SMD Plus
- > Up to 32 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

421,500,000



## DH-XVR5216AN-I3

16CH 2HDDS DIGITAL VIDEO RECORDER

- > 16-channel SMD Plus
- > Up to 24 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

**283,000,000**



## XVR4104HS-I(V2.0)

4CH 1HDD DIGITAL VIDEO RECORDER

- > 4-channel SMD Plus
- > Up to 5 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

**73,000,000**



## XVR5104HS-4KL-I3

4CH 4K 1HDD DIGITAL VIDEO RECORDER

- > 4-channel SMD Plus
- > Up to 8 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

**129,500,000**



## XVR4108HS-I(V2.0)

8CH 1HDD DIGITAL VIDEO RECORDER

- > 8-channel SMD Plus
- > Up to 10 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 16 TB
- > 2 USB
- > Supports HDCVI, AHD, TVI, CVBS and IP video input.
- > H.265+ and H.265 dual-stream video compression.

**88,000,000**



# IPC-PFW3849SP-A180

2X4MP TIOC DUO SPLICING NETWORK CAMERA

Outputs 180° wide angle splicing image

Outputs max. 8 MP (4096 × 1860)@20 fps

25 m IR and 20 m warm light illumination

supports max. 256 G Micro SD card

built in dual Mic; built in speaker, support two-way talk

12 VDC/PoE power supply, IP67 protection



IPC



### DH-IPC-HDW2231TP-AS-S2-QH

2MP FIXED-FOCAL EYEBALL NETWORK CAMERA

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Built-in IR LED, max. IR distance: 30 m
- > ROI, SMART H.264+/H.265+
- > Intelligent detection: Intrusion, tripwire
- > Max. 256 GB Micro SD card, built-in Mic
- > 12V DC/PoE power supply
- > IP67 protection

**99,000,000**



### DH-IPC-HFW2231TP-ZS-S2-QH

2MP VARI-FOCAL BULLET NETWORK CAMERA

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > WDR
- > Built-in IR LED, max IR distance: 60 m
- > ROI, SMART H.264+/H.265+
- > Intelligent detection: Intrusion, tripwire
- > Max. 256 GB Micro SD card
- > IP67 protection, IK10 protection (optional)

**163,700,000**



### DH-IPC-HFW1239TLIP-A-IL

2MP FIXED-FOCAL BULLET NETWORK CAMERA

- > 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
- > Outputs max. 2 MP (1920×1080)@25/30 fps.
- > the max. IR illumination distance is 30 m and warm light distance is 30 m.
- > ROI, SMART H.264 +/H.265+
- > Built in Mic.
- > P67 protection.

**65,500,000**



### DH-IPC-HDW1239VP-A-IL

2MP FIXED-FOCAL EYEBALL NETWORK CAMERA

- > 2MP, 1/2.8" CMOS sensor, high sensitivity
- > maximum IR illumination range of 30m,
- > maximum LED illumination range of 30m
- > RoI scenarios, optimized H.264+/H.265+ codecs,
- > Built-in microphone
- > IP67 protection class
- > Human detection supported

**65,500,000**



## DH-IPC-HFW1439TL1P-A-IL

4MP IR FIXED-FOCAL BULLET NETWORK CAMERA

- > 4 MP, 1/2.9" CMOS sensor, high sensitivity, high resolution
- > maximum IR illumination range of 30 m, maximum LED illumination range of 30 m
- > Built-in microphone
- > Power supply 12 V (DC), PoE
- > Class IP67 protection
- > Human detection supported

82,900,000



## DH-IPC-HDW1439VP-A-IL

4MP FIXED-FOCAL EYEBALL NETWORK CAMERA

- > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- > the max. IR illumination distance is 30 m and warm light distance is 30 m.
- > Built in Mic.
- > IP67 protection.
- > Supports human detection.

82,900,000



## DH-IPC-HDW2449TP-S-IL

4MP FIXED-FOCAL EYEBALL NETWORK CAMERA

- > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- > distance is 30 m and the max. warm light distance is 30 m.
- > Supports max. 256 G Micro SD card; built in MIC.
- > IP67 protection.
- > SMD Plus.

110,800,000



## DH-IPC-HDBW5442RP-ASE-S3

4MP FIXED-FOCAL DOME NETWORK CAMERA

- > 4-MP 1/1.8" CMOS image sensor, low luminance, and high definition image.
- > Outputs max. 4 MP (2688×1520)@25/30fps
- >, and the max. illumination distance is 50 m.
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 1 TB Micro SD card, built-in MIC.
- > 12 VDC/PoE power supply; ePoE.
- > IP67 and IK10 protection.
- > SMD 3.0.

279,500,000



### DH-IPC-HDW2449TP-ZS-IL

4MP VARI-FOCAL EYEBALL NETWORK CAMERA

- > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- > IR distance is 40 m and the max. warm light distance is 40 m.
- > Supports max. 256 G Micro SD card; built in Mic.
- > 12 VDC/PoE power supply, easy for installation.
- > IP67 protection.
- > SMD Plus.

165,800,000



### DH-IPC-HFW3449TIP-AS-PV-S4

4MP FIXED-FOCAL BULLET NETWORK CAMERA

- > 4MP 1/2.7" CMOS image sensor, low luminance, and high definition image.
- > the max. IR illumination distance is 30 m and warm light distance is 30 m.
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in dual MICs; 1-ch speaker; support two-way talk.
- > IP67 protection.

278,600,000



### DH-IPC-HFW5442TP-ASE

4MP IR FIXED-FOCAL BULLET NETWORK CAMERA

- > 4-MP 1/1.8" CMOS image sensor, low luminance, and high definition image.
- > the max. illumination distance is 80 m.
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 1 TB Micro SD card, built-in MIC.
- > 12 VDC/PoE power supply; ePoE.
- > IP67 and IK10 protection.
- > SMD 3.0.

303,600,000



### DH-IPC-HFW2449SP-S-IL

4MP FIXED-FOCAL BULLET NETWORK CAMERA

- > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- > illumination distance is 30 m and the max. warm light distance is 30 m.
- > Supports max. 256 G Micro SD card; built in MIC.
- > 12 VDC/PoE power supply, easy for installation.
- > IP67 protection.
- > SMD Plus.

110,800,000



### DH-IPC-HFW2449TP-AS-IL

4MP FIXED-FOCAL BULLET NETWORK CAMERA

- > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built in MIC.
- > 12 VDC/PoE power supply, easy for installation.
- > IP67, IK10 (optional) protection.
- > SMD Plus.

125,500,000



### DH-IPC-HFW2449TP-ZAS-IL

4MP VARI-FOCAL BULLET NETWORK CAMERA

- > 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- > the max. IR distance is 60 m and the max. warm light distance is 60 m.
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built in Mic.
- > 12 VDC/PoE power supply, easy for installation.
- > IP67, IK10 (optional) protection.
- > SMD Plus.

193,400,000



### DH-IPC-HDBW4841EP-AS

8MP IR FIXED-FOCAL DOME NETWORK CAMERA

- > 8 MP 1/2.8" CMOS image sensor
- > Built-in IR LED, max. IR distance: 30 m
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; max. 256 G Micro SD card.
- > built-in Mic
- > 12 VDC/PoE power supply facilitates installation
- > IP67, IK10 protection
- > SMD 3.0

271,600,000



### DH-SD5A432GB-HNR

4MP 32X STARLIGHT IR NETWORK PTZ CAMERA

- > 1/2.8" 4Megapixel STARVIS™ CMOS.
- > Powerful 32x optical zoom.
- > Max. 25/30 fps@4M.
- > IR distance up to 150 m.
- > Auto Tracking 3.0.
- > Face Detection.
- > SMD 4.0.
- > PoE+.

105,380,000



### DH-SD49225GB-HNR

2MP 25X STARLIGHT NETWORK PTZ CAMERA

- > 1/2.8" STARVIS™ CMOS.
- > 25x optical zoom.
- > Starlight technology.
- > Max. 50/60fps@2M.
- > IR distance up to 100 m.
- > Perimeter protection.
- > Face detection.
- > SMD 4.0.

568,700,000



### IPC-PFW3849SP-A180-E2-AS-PV

2X4MP TIOC DUO SPLICING NETWORK CAMERA

- > Outputs 180° wide angle splicing image.
- > Outputs max. 8 MP (4096 × 1860)@20 fps.
- > the max. IR illumination distance is 25 m and warm light distance is 20 m.
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built in dual Mic; built in speaker, support two-way talk.
- > 12 VDC/PoE power supply, easy for installation.
- > IP67 protection.

341,100,000



### DHI-NVR4104HS-4KS3

4CH 1HDD NETWORK VIDEO RECORDER

- > 4 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 10 TB
- > 2 USB
- > Network Bandwidth 80 Mbps for access and 60 Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

110,500,000



### DHI-NVR4108HS-4KS3

8CH 1HDD NETWORK VIDEO RECORDER

- > 8 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 20 TB
- > 2 USB
- > Network Bandwidth 80 Mbps for access and 60 Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

140,100,000



## DHI-NVR5216-EI

16CH 2HDD NETWORK VIDEO RECORDER

- > 16 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2 HDD up to 20 TB
- > 2 USB
- > Network Bandwidth 384Mbps for access and 384Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**388,700,000**



## DHI-NVR4216-EI

16CH 2HDDS NETWORK VIDEO RECORDER

- > 16 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2 HDD up to 16 TB
- > 2 USB
- > Network Bandwidth 256Mbps for access and 256Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**239,600,000**



## DHI-NVR16-4216P-4KS2/L

16 CHANNEL 2HDDS NETWORK VIDEO RECORDER

- > 16 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2 HDD up to 10 TB
- > 2 USB
- > Network Bandwidth 160 Mbps for access and 64Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**353,500,000**



## DHI-NVR2116HS-S3

16 CHANNEL 1HDD NETWORK VIDEO RECORDER

- > 16 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 16 TB
- > 2 USB
- > Network Bandwidth 80 Mbps for access and 60Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**170,900,000**



## DHI-NVR5232-EI

32CH 2HDD NETWORK VIDEO RECORDER

- > 32 channels of IPC access
- > 1 HDMI, 1 VGA
- > 2 HDD up to 20TB
- > 2 USB
- > Network Bandwidth 384Mbps for access and 384Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**522,900,000**



## DHI-NVR5432-EI

32CH 4HDD NETWORK VIDEO RECORDER

- > 32 channels of IPC access
- > 2 HDMI, 2 VGA
- > 4HDD up to 20TB
- > 3 USB
- > Network Bandwidth 384Mbps for access and 384Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**727,300,000**



## DHI-NVR608H-32-XI

32CH 8HDDS NETWORK VIDEO RECORDER

- > 32 channels of IPC access
- > 4 HDMI, 2 VGA
- > 8 HDD up to 20TB
- > 4 USB
- > Network Bandwidth 1280 Mbps for access and 1024Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**1,521,900,000**



## DHI-NVR5464-EI

64CH 4HDD NETWORK VIDEO RECORDER

- > 64 channels of IPC access
- > 2 HDMI, 2 VGA
- > 4 HDD up to 20TB
- > 3 USB
- > Network Bandwidth 384 Mbps for access and 384Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**987,900,000**



## DHI-NVR608H-64-XI

64CH 8HDDS NETWORK VIDEO RECORDER

- > 64 channels of IPC access
- > 4 HDMI, 2 VGA
- > 8 HDD up to 20TB
- > 4 USB
- > Network Bandwidth 1280 Mbps for access and 1024Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**239,330,0000**



## DHI-NVR608H-128-XI

128CH 8HDDS NETWORK VIDEO RECORDER

- > 128 channels of IPC access
- > 4 HDMI, 2 VGA
- > 8 HDD up to 20TB
- > 4 USB
- > Network Bandwidth 1280 Mbps for access and 1024Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**334,400,0000**



## DHI-NVR2104HS-I2

4 CHANNEL 1HDD NETWORK VIDEO RECORDER

- > 4 channels of IPC access
- > 1 HDMI, 1 VGA
- > 1 HDD up to 10 TB
- > 2 USB
- > Network Bandwidth 80 Mbps for access and 60 Mbps for forwarding.
- > H.265+ and H.265 dual-stream video compression.

**122,400,000**

# alhua

TECHNOLOGY



## SD-P3AE-PV-0400B

4G NETWORK CAMERA 3MP FIXED-FOCAL

1/2.8" 3Megapixel CMOS.

Max. 25/30 fps@ 2304 (H) × 1296 (V)

30 m IR and 30 m white light

Human detection, Tripwire, intrusion, H.265 encoding.

Wi-Fi, Two-way talk, Sound and light alarm, IP66



WI-FI



## IPC-HFW1239DTP-4G-ST-IL-MC

2MP 4G BULLET WIFI CAMERA

- > 2-MP 1/2.8" CMOS
- > Outputs max. 2 MP (1920 × 1080)@25/30 fps.
- > the max. IR light distance is 30 m and max. warm light distance is 30 m.
- > Supports max. 256 G Micro SD card; built in Mic and speaker.
- > 12 VDC power supply.
- > IP67 protection.
- > Supports 4G.

**112,900,000**



## DH-IPC-P3DP-3F-PV

3+3MP OUTDOOR WI-FI DUAL-LENS CAMERA

- > 3+3MP 1/2.8" CMOS
- > Outputs max. 2304 × 1296@15 fps
- > the max. IR light distance is 30 m and max. warm light distance is 20 m.
- > Supports max. 256 G Micro SD card; built in Mic and speaker.
- > 12 VDC power supply.
- > IP67 protection.
- > Supports 4G.

**110,500,000**



## DH-SD2A200HB-GN-AW-PV-S2

2MP FULL-COLOR NETWORK PT CAMERA

- > 1/2.8" 2Megapixel CMOS.
- > Max. 25/30 fps@1080p.
- > Human detection.
- > Tripwire, intrusion.
- > H.265 encoding.
- > Wi-Fi.
- > Two-way talk.
- > Sound and light alarm.
- > IR and white light, three night view modes.
- > IP66

**75,400,000**



## DH-IPC-H4AP

4MP WI-FI NETWORK CAMERA

- > 4-MP 1/3" CMOS image sensor, low luminance, and high definition
- > Built-in IR LED, and the max. IR illumination distance is 10 m.
- > Supports max. 256 G Micro SD card; built-in Mic; built-in speaker.
- > 5 VDC power supply.
- > Supports Wi-Fi.
- > Supports motion detection, human detection.

**60,400,000**



## DH-SD-H2C-0400B

2MP FIXED-FOCAL WI-FI NETWORK CAMERA

1/2.8" CMOS  
4mm lens  
compression: H.265+, H.265, H.264+, H.264, MJPEG  
2 streams up to 2MP@25fps  
Video analytics: people detection, line crossing, perimeter protection  
IR illumination 15m  
built-in microphone + speaker  
MicroSD up to 512GB  
power supply: 5V(DC) Type-C  
Wi-Fi 2.4GHz

51,900,000



## DH-SD-H4C-0400B

4MP FIXED-FOCAL WI-FI NETWORK CAMERA

1/2.8" CMOS  
4mm lens  
compression: H.265+, H.265, H.264+, H.264, MJPEG  
2 streams up to 4MP@25fps  
Video analytics: people detection, line crossing, perimeter protection  
IR illumination 15m  
built-in microphone + speaker  
MicroSD up to 512GB  
power supply: 5V(DC) Type-C  
Wi-Fi 2.4GHz

60,400,000



## SD-P3AE-PV-0400B

3MP FIXED-FOCAL 4G NETWORK CAMERA

> 1/2.8" 3Megapixel CMOS.  
> Max. 25/30 fps@ 2304 (H) x 1296 (V)  
> Human detection.  
> Tripwire, intrusion.  
> H.265 encoding.  
> Wi-Fi.  
> Two-way talk.  
> Sound and light alarm.  
> IR and white light, three night view modes.  
> IP66

95,500,000



## DHI-NVR1108HS-W-S2-CE

8 CH 1HDD NETWORK VIDEO RECORDER

> 8 channels  
> 1 HDMI, 1 VGA  
> 1 HDD up to 16 TB  
> 2 USB  
> Network Wired Bandwidth 40 Mbps for access and 20Mbps for forwarding.  
> Network Wi Fi Bandwidth 16 Mbps for access and 16Mbps for forwarding.  
> H.265+ and H.265 dual-stream video compression.

95,500,000